
Determine which motor you have & electrical preparation

Please read these instructions prior to starting







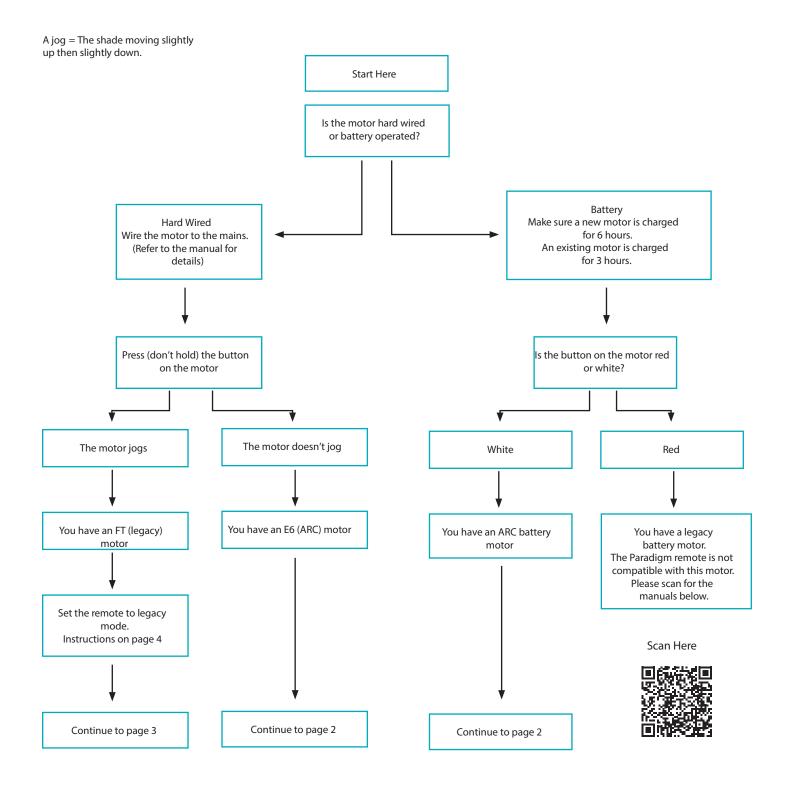

ARC Motor Programming

Please read these instructions prior to starting

The instructions for the hard-wired and battery ARC motor are the same.

P2 = The button on the top left under the battery cover. Start Here Press and hold P1 until the motor jogs * * If you are using a multi-channel remote, select the desired channel Within 4 seconds press and hold STOP on the remote until the motor jogs Motor doesn't jog Motor jogs The remote may not be in Continue ARC mode. Setting the limits Refer to page 4 for instructions Move the shade to the desired **UP** limit Does the motor travel in the correct direction? Press UP and STOP until the motor jogs No Move the shade to the desired DOWN limit Press UP and DOWN together until the motor jogs Press DOWN and STOP until the motor jogs The shade is now ready for operation

For the complete ARC battery motor manual. Scan Here.

Yes

Continue



For the complete ARC hard-wired motor manual. Scan Here.












P1 = The button on the motor head.

© 2017 Rollease Acmeda

FT Motor Programming

Please read these instructions prior to starting

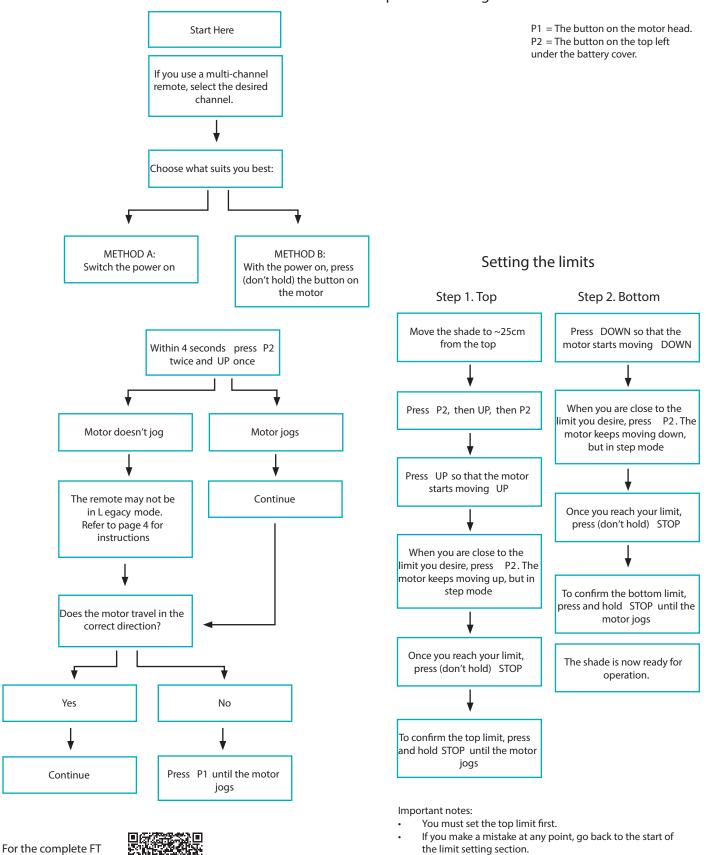

Page 3 of 4

motor manual. Scan Here.









Toggling the remote between ARC and Legacy mode

1. Turn the remote over and remove the battery cover



2. Remove the battery




3. Locate the button labelled P2 at the top left $% \left(1\right) =\left(1\right) \left(1$



4. Press and hold P2



5. Reinsert the battery while still holding P2



6. While executing the above, watch the screen or LED to confirm

15 Channel Remote



Screen flashes 5 times 1 = ARC Mode 2 = non-ARC mode (EL)

1 Channel Remote



1 flash = ARC Mode 2 flashes = non-ARC mode (EL)

7. Replace battery cover



Mode Change Youtube Video on a 1 channel remote Scan Here.



Mode Change Youtube Video on a 15 channel remote Scan Here.





