
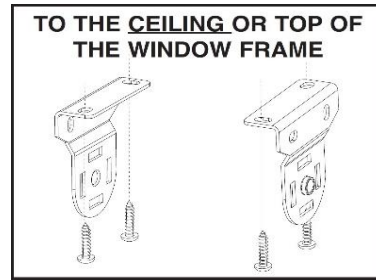
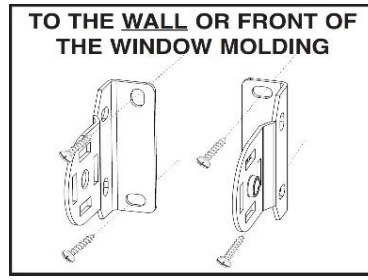


# SunBoss Installation Procedure

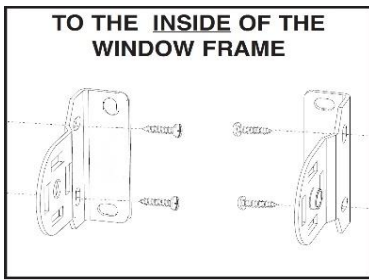

## Mount The Brackets

Brackets are universal so the Clutch can be mounted on either side.

**NOTE:** If sharing a bracket between two blinds the bracket can only be shared between a Clutch and a Pin End (head to tail). For Pin to Pin installations please use Centre Bracket with a Pin to Pin Retainer.

## Pin End First!


1. Put the spring loaded Pin End into the hole in the bracket.

## Next the Clutch


2. Keeping gentle pressure against the Pin End lift the Clutch up and align the two hooks on the Clutch with the two slots in the bracket. The hooks should fall into place in the bracket, pull down gently to secure the blind into the bracket. \*\*The bottom of the Clutch should point straight down.

**Finally:** Secure the ball chain off to the wall or inside the reveal with a Child Safety Device to comply with the Australian Child safety Regulations.

\*\*

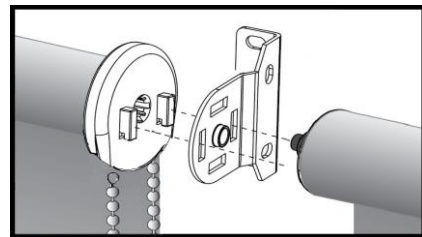

1

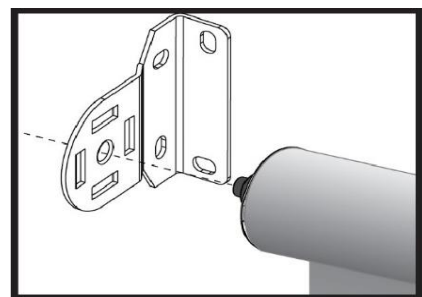

2

